DN800 EN10217-7 Stainless Steel Seamless Welded Pipes

Basic Information

Place of Origin: CHINABrand Name: DEYE

Certification: ISO9001:2015 CE
 Model Number: DY-SP-S19
 Minimum Order Quantity: 5 TONS

• Price: USD600/ each ton

Packaging Details: wooden case, pallet, bundles or as

customers' requirement

• Delivery Time: 30 days for usual order, 7 days for stock

sizes

• Payment Terms: T/T, D/P, L/C

Supply Ability: 1000 tons for each month



Product Specification

• Standard: ASME B36.19M, DIN, GOST

• Material: SS316/SS316L, SS304/304L, SAF2507,

SAF2205, UNS31803, UNS32750, 904L,

INCONEL625

• Size: 1/2"(DN15)-24"(DN600) For SMLS 12"

(DN200)-88"(DN2200) For Welded

• Types: Seamless Pipe, Welded Pipe, ERW Pipe,

SAW Pipe, FAW Pipe

• Highlight: DN800 Seamless Welded Pipes,

EN10217-7 Seamless Welded Pipes, DN15 stainless steel seamless pipes

Product Description

stainless steel pipe conforms to the ASTM A312 standard includes seamless stainless-steel pipes and welded stainless steel ipe. The specification meets strict certifications required on project piping systems with superior strength and corrosion resistance for use in various applications. Pipe cutting, bending, polishing, threading and grooving services finish and customize to specifications.

. The material is available in SS304, SS316, SS304L, SS316L and also dual grade SS304/304L, 316/316L, DUPLEX SS2205 2507 with length 6m, 12m or single random length, double random length , also the length can be as per customer's request.

Product Information/Product Description/Basis Information/Specification

BIG SIZE DN800 EN10217-7 STAINLESS STEEL WELDED PIPES
DN: Seamless:10-914mm 3/8"-36"
Wall Thickness: SCH5S, SCH10S SCH10 SCH20 SCH30 STD SCH40S, SCH40, SCH80S, SCH80, SCH60 XS SCH100 SCH120S SCH120 SCH140 SCH160 XXS 2mm-120mm Accept customization
Single random length/Double random length/Fixed Length 5m-14m,5.8m,6m,10m-12m,12m Accept customization
Annealed, acid pickling or polished.
Stainless steel: SS304, SS304L, SS304H, SS321, SS316, SS316L, SS310S, 904L, Dual grade SS304/304L, SS316/316L Duplex: 2205, 2507, F55, UNS31083, UNS32750, UNS32760 Stainless steel pipes with material of 1.4301, 1.4307, 1.4541, 1.4401, 1.4404, 1.4571, 1.4878, 1.4432, 1.4462 Nickle Alloy: Hastelloy C276, Inconel 601, Inconel 625, Inconel 718
AASME, ASTM, MSS, JIS, DIN, EN * American ASME B36.10M, ASTM, API 5L, API 5CT * Japanese JIS * German DIN * Chinese GB * BS standard
Plain end/Beveled, protected by plastic caps on both ends, cut square, grooved, threaded and coupling.
Petroleum, chemical, power, gas, metallurgy, shipbuilding, construction, etc
wooden case, pallet , bundles or as customers' requirement
By 20GP/40GP containers, by loose Containers LCL; bulk vessels, top open containers

Features / Characteristics

Stainless steel is with low-cost and corrosion-resistant material with a high level of durability.

It is ideal for both residential and marine applications. Not only is it durable and long-lasting with a perfect surface finish, but it also has excellent strength.

Stainless Steel Seamless Pipes / Tubes are widely used in commercial and industrial fields, especially fluid transportation. With appropriate processes, they have superior performance in high pressure, high strength, and corrosion resistance.

Stainless steel seamless pipe can resist both very Low Temperature and high temperatures for cleanliness and maintain the purity of materials which contact stainless steel directly

Technology/ Technical Data Sheets

UNIT:MM								
Norminal	Outside	Normin	al Wall Th	ickness				
Pipe Size DN (in)	Dimeter D	Sch5s	Sch10S	Sch40s	Sch40	Sch80s	Schl20	Sch160
1/8	10. 3	—	1. 24	1. 73	1. 73	2. 41	F	\vdash
1/4	13. 7	F	1. 65	2. 24	2. 24	3. 02	\vdash	F
3/8	17. 1	\vdash	1. 65	2. 31	2. 31	3. 20	\vdash	\vdash
1/2	21. 3	1.65	2. 11	2. 77	2. 77	3. 73	—	4. 78
3/4	26. 7	1.65	2. 11	2. 87	2. 87	3. 91	—	5. 56
1	33.4	1. 65	2. 77	3. 38	3. 38	4. 55	\vdash	6. 35
1 1/4	42. 2	1.65	2. 77	3. 56	3. 56	4. 85	\vdash	6. 35
1 1/2	48. 3	1.65	2. 77	3. 68	3. 68	5. 08	—	7. 14
2	60. 3	1. 65	2. 77	3. 91	3. 91	5. 54	 	8. 74
2 1/2	73. 0	2. 11	3. 05	5. 16	5. 16	7. 01	\vdash	9. 53

3	88. 9	2. 11	3. 05	5. 49	5. 49	7. 62	F	11. 13
3 1/2	101. 6	2. 11	3. 05	5. 74	5. 74	8. 08	—	\vdash
4	114. 3	2. 11	3. 05	6. 02	6. 02	8. 56	11. 13	13. 49
5	141. 3	2. 77	3. 40	6. 55	6. 55	9. 53	12. 70	15. 88
6	168. 3	2. 77	3. 40	7. 11	7. 11	10. 97	14. 27	18. 26
8	219. 1	2. 77	3. 76	8. 18	8. 18	12. 70	18. 26	23. 01
10	273. 1	3. 40	4. 19	9. 27	9.27	12. 70	21. 44	28. 58
12	323.9	3. 96	4. 57	9. 53	10. 31	12. 70	25. 40	33. 32
14	355. 6	3. 96	4. 78	F	11. 13	F	27. 79	35. 71
16	406. 4	4. 19	4. 78	—	12. 70	\vdash	30. 96	40. 49
18	457. 2	4. 19	4. 78	\vdash	14. 27	F-	34. 96	45. 24
20	508. 0	4. 78	5. 54	F	15. 09	F	38. 10	50. 01
22	558. 8	4. 78	5. 54	\vdash	\vdash	\vdash	41. 28	53. 98
24	609. 6	5. 54	6. 35		17. 48		46. 02	59. 54

Welded stainless steel with single Longitudinal Welded seam and double Weld seam Size range from 1/2" to 48" DN15-DN1200.

The reference Standard for the stainless pipes

ASTM A312/A312M, ASME SA312/SA312M for Seamless Austenitic Stainless-Steel Pipes:

ASTM A269, ASME SA269 for Seamless Austenitic Stainless-Steel Tubing for General Service

ASTM A213/A213M, ASME SA213/SA213M for Seamless Austenitic Alloy-Steel Boiler, Super Heater and Heat-Exchanger Tubes

ASTM A789 / A789M. Seamless Duplex Stainless Steel Tubing for General Service.

ASTM A790 / A790M for Seamless Duplex Stainless Steel Pipes

ASTM A511 for Seamless Stainless Steel Mechanical Tubing

EN 10216, DIN 17456, 17458 for Seamless Stainless-Steel Tubes for Pressure Purposes

用:Material Grades:

Stainless steel is the abbreviation for stainless and acid resistant steel. Steel that is resistant to weak corrosive media such as air, steam, water, or has rust resistance is called stainless steel; And the steel grade that is resistant to chemical corrosion media (such as acid, alkali, salt, etc.) corrosion is called acid resistant steel.

The most common used material is SS304/304L, SS316/316L, DUPLEX SAF2507, SAF2205, Detail's specification of the material as below.

	(UNS S30400/S3						
Chemical Composition%							
С	Cr	Mn	Ni	Р	S	Si	
≤		≤		≤	≤	≤	
0.035	18.0-20.0	2.00	8.0-13.0	0.045	0.03	1.00	

Tensile Strength: ≥ 485 Mpa (70KSI) Yield Strength: ≥170Mpa (25KSPI)

Elongation ≥ 40%

316/316L (UNS	S31600/S316	03)					
Chemical Composition%							
C	Cr	Mn	Мо	Ni	Р	S	Si
≤		≤			≤	≤	≤
0.035	16.0-18.0	2.00	2.0-3.0	10.0- 14.0	0.045	0.03	1.00

Tensile Strength: ≥ 485 Mpa (70KSI) Yield Strength: ≥170Mpa (25KSPI)

Elongation ≥ 40%

SAF2205 (UNS31803)

Chemical Composition%

C≤	Si ≤	Mn≤	P≤	S≤	Cr	Ni	Мо	Cu	N
0.03	1.0	2.0	0.03	0.02	22-23	4.5-6.5	3.0-3.50	/	0.14-0.2

Mechanical Performance

Test Items	Test Temp.	Performance	Standard Data
Tensile Strength		Yield Strength s≥	450 Mpa
	Room Temp.	Tensile Strength h ≥	620 Mpa
	noom remp.	Elongation % >	25
		Reduction of Area=>	/
Impact Value KV(J)	Room Temp.	Lateral	/
Brinell hardness	Room Temp.	<u> </u>	290

Rockwell hardness Room Temp.	≥	/
------------------------------	---	---

SAF2507(UNS32750)


Chemical Composition%

c≤	Si≤	Mn≤	P≤	S≤	Cr	Ni	Мо	Cu≤	N
0.03	0.8	1.2	0.03	0.015	24-26	6.0-8.0	3.0-5.0	0.5	0.24-0.32

Mechanical Performance

Test Items	Test Temp.	Performance		Standard Data
Tensile	Room Temp.		Ø≤55 Rm≥	550 Mpa
		Yield Strength	Ø >55 Rm≥	515 Mpa
		II ensile Strength	Ø≤55 R0.002 ≥	800 Mpa
			Ø >55 R0.002≥	760 Mpa
		Elongation A%	Ø≤55 ≥	15
		(4D) >	Ø >55 ≥	15
Brinell hardness HB	Room	Ø≤5 ≤		310
Dillicii Hardiness Fib	Temp.	Ø >55 ≤	310	

Production Process

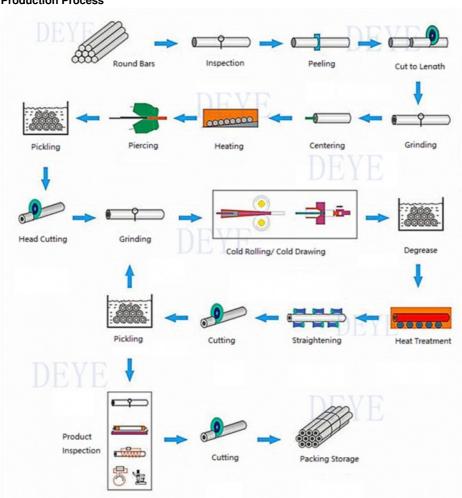

Application/Usage

Stainless steel pipe and tubing are used in chemical plants, aviation fields, marine equipment, cryogenic transportation, medical and architectural industries.

- Chemical plants
- Aviation fields
- Marine equipment
- Cryogenic transportation
- Medical & architectural industries

FAQ/ Customer Question and Answers

Q: What is difference between tubes and pipes?

A: Tubes and pipes are difficult to identify occasionally and some people use the name of tube and pipe interchangeably. However, there are significant differences between tubes and pipes. Tubes are measured in outer diameter and wall thickness. The tube is produced with close tolerance range and requires precise outer diameter and wall thickness to identify its working pressure.

Q: What is Difference Between Stainless Steel Pipes Seamless and Welded?

- A: 1) Strength: The main difference between seamless and welded pipes is in their strength. Seamless pipes are stronger because they do not have any welded seams. Welded pipes are weaker because the welds can act as weak points that could break under high pressure.
- 2)Cost: Seamless stainless-steel pipes are more expensive than welded ones because they require more time and effort. Welded pipes are less expensive because they can be made quickly and with less precision.
- 3) Applications: Seamless stainless-steel pipes are typically used in high-pressure applications, such as hydraulic systems, while welded pipes are used in low-pressure applications, such as water piping.

Our Service

- 1. Technical support
- 2. Raw Material Quality control.
- 3. Inspection during the production time.
- 4. Final Test includes Surface, Dimension, PT Test, RT test, ultrasonic Test
- 5. Test Report each shipment
- 4. Flexible Delivery terms. EXW FOB CIF CFR DDP DDU
- 5. Flexible payment Ways: LC. TT. DP
- 6. Customized Package includes Logo. Cases Dimension.
- 7. 18 months quality Guarantee time.
- 9. Free replacement by air if any error founded
- 10. 24 hours to Feedback your questions

SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)



+8613292824811





piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China