



## Low Pressure Class 150 Stainless Steel Threaded Fitting For Coupling

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: STH-TH-19
- Minimum Order Quantity: 10pcs
- Price: USD0.5-USD50 for each pc
- Packaging Details: Cartons+Ply-wooden cases, Pallets
- Delivery Time: 7 days for stock items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 1000000PCS one month



### Product Specification

- Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
- Casting: Investment Casting
- Material: 304/304L, 316/316L
- Size: 1/4"-4"
- Highlight: **Low Pressure stainless steel threaded fitting, 1/4" stainless steel threaded fitting, 4in stainless threaded fittings**

for more products please visit us on [piping-industry.com](http://piping-industry.com)

## Product Description

### LOW PRESSURE STAINLESS STEEL THREADED PIPE FITTINGS FOR COUPLING

























Our high quality **150 lbs stainless steel cast full couplings** are corrosion resistant and are available in multiple sizes from 1/8" to 6" The connected threaded are NPT meet ASME B1.20.1 or BSPT BSPP meets ISO BS21, DIN2999.

We supply 150 lb half cast couplings and 150 lb full cast couplings. Our inventory includes: threaded full couplings, threaded half couplings, threaded reducing couplings, socket weld full couplings, socket weld half couplings and socket weld reducing couplings. We can accommodate any need with our wide-ranging and hard to find sizes. Good corrosion resistance for many applications for many industries

### Product Information/Product Description/Basis Information/Specification

Description	Low Pressure Class 150 Stainless Steel Threaded Fitting For Coupling
Product name	threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee
Size	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"
Gasket	NBR, FKM
Thread	BSPT,BSPP, NPT,PS , DIN
Material	stainless steel201,202, stainless steel304, stainless steel 316
Casting Method	Investment precision casting, CNC machine
Application	Oil, Water, Industrial, Chemical
Test pressure	Usually 150PSI
Package	pcs/polybag, polybag/carton, cartons/pallet or according to your requirement
Advantages	1.OEM and Customized service can be provided 2. With experience,quality guaranteed 3. Approved by ISO9001:2015 4. With independent open mold capacity, OEM supposed


### Technology/ Technical Data Sheets

					
90° Elbow	90° Street Elbow	90° Elbow	90° Street Elbow	45° Elbow	45° Elbow
					
Tee	Cross	Cross	Cross	Hex. Nipple	Hex. Nipple
					
Hex. Plug	Square Plug	Square Plug	Square Plug	Hex. Cap	Hex. Cap
					
Round Cap	Coupling (Socket)	Coupling (Socket)	Coupling (Socket)	Half Coupling	Half Coupling

SIZE	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
1/8"	16	18	16	17	25	22	18	17	13	-	-	-
1/4"	19	19	19	20	30	30	18	21	15	15	25	11
3/8"	24	20	25	24	34	31	19	23	17	17	26	12
1/2"	25.5	20	28	26	37	35	22	24	19	17.5	32	15
3/4"	29.5	23	32	30	43	39	24	25	18	20.5	33	17
1"	36	26	39	36	51	45	27	27	20.5	23.5	38	19
1-1/4"	43.5	30	45	44	59	48	26	34.5	22	25.5	44	22
1-1/2"	46.5	33	49	47	64	50	29.5	35.5	23	26.5	44	23

2"	55.5	38	57	54	74	57	32	36	25.5	28	50	25
2-1/2"	66	45	69	66	90	64	36.5	43	28.5	31	58	29
3"	74	52	-	74	99	70	37.5	46.5	30.5	33	66	33
4"	90	64	-	90	115	79	42	52	38.5	37	72	36

#### Production Process

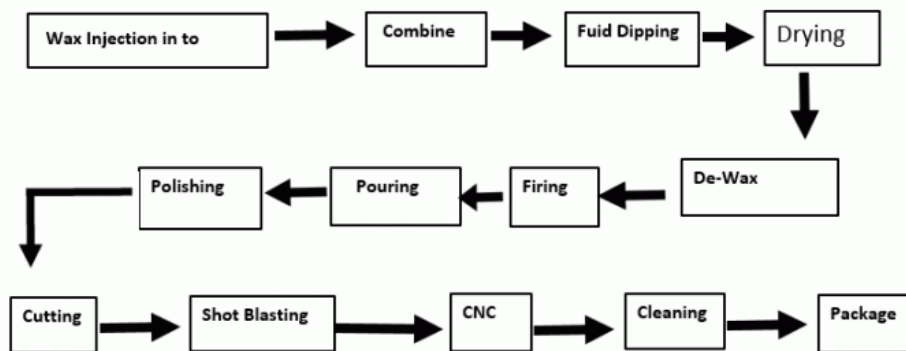

#### Common used Material Grade

SS316 Chemical Composition

ASTM A351 CF8M, SS316 Chemical Composition in %

ASTM A351 CF8M, SS316 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						9.0	18.0	2.00
Max.	0.080	1.500	0.040	0.040	1.500	12.0	21.0	3.00

SS316 Mechanical Properties of the Fittings at room temperature

SS316/S S316L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	30	
Max.				80

SS304 Chemical Composition

ASTM A351 CF8, SS304 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						8.0	18.0	
Max.	0.080	1.500	0.040	0.040	2.000	11.0	21.0	0.50

SS304 Mechanical Properties of the Fittings at room temperature

SS304/S S304L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	35	
Max.				

#### Application/ Usage:

Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and low-pressure steam pipes.

**DEYE SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)**

+8613292824811    sales@deyepiping.com    piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China