



SS304 SS316 150PSI Threaded Stainless Steel Tapered Fittings Street Elbow

Our Product Introduction

for more products please visit us on piping-industry.com

Basic Information

- Place of Origin: China
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: STH-TH-21
- Minimum Order Quantity: 10pcs
- Price: USD0.5-USD50 for each pc
- Packaging Details: Cartons+Ply-wooden cases, Pallets
- Delivery Time: 7 days for stock items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 1000000PCS one month



Product Specification

- Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
- Casting: Investment Casting
- Material: 304/304L, 316/316L
- Size: 1/4"-4"
- Highlight: Threaded stainless steel screwed fittings, 150PSI stainless steel screwed fittings, SS304 street elbow



More Images



Product Description

150PSI SS304 SS316 STAINLESS STEEL THREADED SCREW FITTINGS STREET ELBOW





















Class 150 street elbow with stainless steel Material Conforms To ASTM-A-351, Threads Conform To ANSME B1.20.1, Meets MSS-SP-114 Class 150 Pressure Ratings Max. Unlike regular elbows, street elbow has a female fitting on one end and a male fitting on the other for change the direction of the fluid in pipeline.

All stainless steel pipe fittings are monitored by quality control personnel for strict compliance with applicable standards & specifications. These stainless steel pipe fittings are excellent for uses that involve chemicals or liquids that may be corrosive. Along with fighting corrosion, a stainless steel pipe fitting will prevent contamination making it useful to many professionals.

Product Information/Product Description/Basis Information/Specification

Description	SS304 SS316 150PSI Threaded Stainless Steel Tapered Fittings Street Elbow
Product name	threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee
Size	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"
Gasket	NBR, FKM
Thread	BSPT, BSPP, NPT, PS, DIN
Material	stainless steel 201, 202, stainless steel 304, stainless steel 316
Casting Method	Investment precision casting, CNC machine
Application	Oil, Water, Industrial, Chemical
Test pressure	Usually 150PSI
Package	pcs/polybag, polybag/carton, cartons/pallet or according to your requirement
Advantages	1. OEM and Customized service can be provided 2. With experience, quality guaranteed 3. Approved by ISO9001:2015 4. With independent open mold capacity, OEM supposed

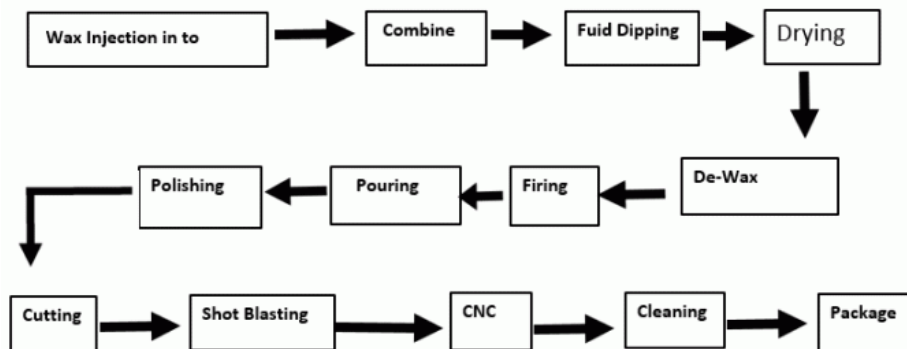
Technology/ Technical Data Sheets

				
90° Elbow	90° Street Elbow	90° Street Elbow	45° Elbow	45° Elbow
				
Tee	Cross	Cross	Hex. Nipple	Hex. Nipple
				
Hex. Plug	Square Plug	Square Plug	Hex. Cap	Hex. Cap
				
Round Cap	Coupling (Socket)	Coupling (Socket)	Half Coupling	Half Coupling

SIZE	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
1/8"	16	18	16	17	25	22	18	17	13	-	-	-
1/4"	19	19	19	20	30	30	18	21	15	15	25	11
3/8"	24	20	25	24	34	31	19	23	17	17	26	12
1/2"	25.5	20	28	26	37	35	22	24	19	17.5	32	15
3/4"	29.5	23	32	30	43	39	24	25	18	20.5	33	17
1"	36	26	39	36	51	45	27	27	20.5	23.5	38	19
1-1/4"	43.5	30	45	44	59	48	26	34.5	22	25.5	44	22

1-1/2"	46.5	33	49	47	64	50	29.5	35.5	23	26.5	44	23
2"	55.5	38	57	54	74	57	32	36	25.5	28	50	25
2-1/2"	66	45	69	66	90	64	36.5	43	28.5	31	58	29
3"	74	52	-	74	99	70	37.5	46.5	30.5	33	66	33
4"	90	64	-	90	115	79	42	52	38.5	37	72	36

Production Process



Common used Material Grade

SS316 Chemical Composition

ASTM A351 CF8M, SS316 Chemical Composition in %

ASTM A351 CF8M, SS316 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						9.0	18.0	2.00
Max.	0.080	1.500	0.040	0.040	1.500	12.0	21.0	3.00

SS316 Mechanical Properties of the Fittings at room temperature

SS316/S S316L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	30	
Max.				80

SS304 Chemical Composition

ASTM A351 CF8, SS304 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						8.0	18.0	
Max.	0.080	1.500	0.040	0.040	2.000	11.0	21.0	0.50

SS304 Mechanical Properties of the Fittings at room temperature

SS304/S S304L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	35	
Max.				

Application/ Usage:

Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and low-pressure steam pipes.

DEYE SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)

+8613292824811 sales@deyepiping.com piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China